


Submittal

TAG:

Condensing Unit

Up to 15.2 SEER2

Cooling capacity: 18 kBTU/h

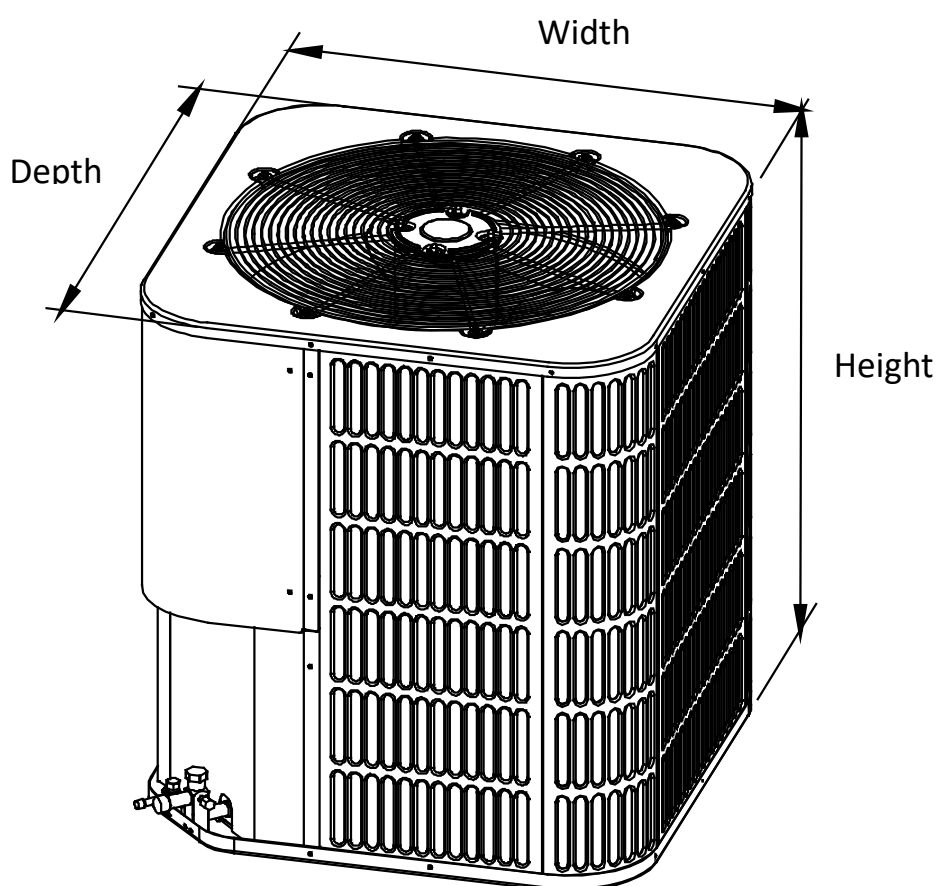

AAC5018E1000A	
UNIT DIMENSION AND WEIGHTS	
Height (in.)	24-15/16
Width (in.)	23-5/8
Depth (in.)	23-5/8
Weight (lbs.)	117

Specifications

	AAC5018E1000A
NOMINAL CAPACITY	
Cooling (BTU/h)	18,000
Heating (BTU/h)	/
ELECTRICAL DATA	
Voltage / Phase (60 Hz)	208/230 / 1
Min. / Max. Voltage	187/253
MCA	11.6
MOP	15
COMPRESSOR	
Type	Rotary
Stage	Single
RLA	8
LRA	35
Crankcase Heater	NO
CONDENSER COIL	
Type	Tube & Fin
Tube Size(O.D)	3/16
FAN MOTOR	
Motor Type	ECM
Capacitor(uF)	/
Horsepower (HP)	1-1/6
Full Load Amps (FLA)	1.6
REFRIGERATION SYSTEM	
Liquid Valve Size (O.D.)	3/8
Suction Valve Size (O.D.)	3/4
Liquid Line Size ("O.D.)	3/8
Suction Line Size ("O.D.)	3/4
Refrigerant Charge (lbs. - oz.)	4 LBS.-14 OZ
Superheat(°F)	9°F
OPERATION RANGE	
Cooling(°F)	55-115
Heating(°F)	/
SOUND POWER (DB)	70

Standard Features:

- R410A chlorine-free refrigerant.
- Energy-efficient compressor.
- Internally protection against high temperature motor overload conditions.
- High quality condenser with inner-groove copper tube and aluminum fin.
- Service valves with sweat connections and easy-access gauge ports.
- Factory-installed high pressure switch
- AHRI certified and ETL listed
- Optional drier filter as accessory.

Cabinet Features:

- Unique sound control top design.
- Compact design, easy installation and transportation.
- Powder-painted galvanized steel cabinet.
- Wire fan discharge grille.
- Steel louver coil guard

Note: Product specifications change from time to time as product improvements and developments are released and may vary from those in this document. Tuttokool has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

