

LED T8 Type A

25-32W REPLACEMENT
11-14 Watt LED

OVERVIEW

Simply Conserve® LED T8 Type A Lamps are an ideal plug-and-play replacement for 32W fluorescent tubes—delivering up to 2200 lumens while consuming less than half the power. Designed for ease of installation, the lamp features a durable glass construction that fits directly into existing fixtures without the need for rewiring or ballast bypass. Compatible with most electronic instant-start and programmed rapid-start T8 ballasts, this retrofit solution offers fast upgrades with bright, reliable performance. Perfect for commercial, industrial, and utility applications looking to reduce energy use without replacing entire fixtures.



SIMPLY CONSERVE®

FEATURES

- **Plug-and-Play Installation**
Installs quickly with no rewiring—fits directly into most linear fluorescent fixtures using existing electronic ballasts.
- **Long Life, Low Maintenance**
Rated for 50,000 hours of use, reducing the need for frequent replacements and lowering total cost of ownership.
- **Smooth, Uniform Light Distribution**
Specialized cover design ensures flicker-free lighting with no dark spots or visual glare.
- **Durable Glass Construction**
Provides excellent heat dissipation, structural strength, and a clean visual aesthetic.
- **Reliable in a Range of Conditions**
Suitable for enclosed fixtures and damp locations, with wide operating and storage temperature ranges (-4°F to 113°F operation; -40°F to 185°F storage).
- **True-to-Life Color**
High CRI (≥80) delivers accurate color rendering in offices, retail spaces, and other visual environments.
- **Safe and Low Emissions**
Contains no UV or IR radiation and meets RoHS, DLC, and UL listing standards.



BEAM
ANGLE



50,000
HOURS



TRUE
COLOR



FLICKER-
FREE



EASY TO
INSTALL



DAMP-
RATED

ORDERING INFORMATION

SOURCE	LAMP WATTAGE	LAMP TYPE	MATERIAL	CCT	OPERATION
L = LED	11 = 11W 14 = 14W	T8 = T8 Tube	G = Glass	40 = 4000K	A = UL Type A



LED T8 Type A



SIMPLY CONSERVE®

Savings Start Here™

SPECIFICATIONS

MODEL #	LAMP WATTS	EFFICACY	CCT	LUMENS	CRI	VOLTAGE	PF	HZ	DIM
L11T8G40A-25PK	11W	163 lm/W	4000K	1800	≥80	BALLAST-DEPENDENT	≥0.9	50/60	NO
L11T8G50A-25PK	11W	163 lm/W	5000K	1800	≥80	BALLAST-DEPENDENT	≥0.9	50/60	NO
L14T8G40A	14W	157 lm/W	4000K	2000	≥80	BALLAST-DEPENDENT	≥0.9	50/60	NO
L14T8G50A	14W	157 lm/W	5000K	2000	≥80	BALLAST-DEPENDENT	≥0.9	50/60	NO

DIMENSIONS

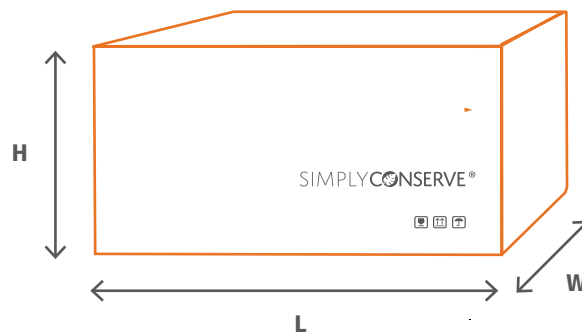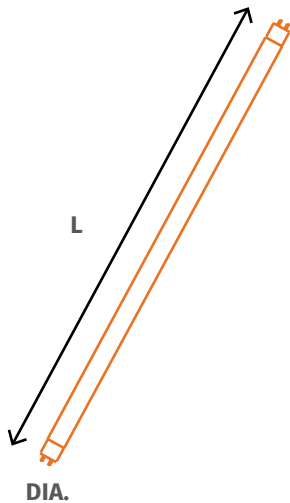

PRODUCT

MODEL #	DIAMETER	L
L11T8G40A-25PK	1"	48"
L11T8G50A-25PK	1"	48"
L14T8G40A	1"	48"
L14T8G50A	1"	48"

CASE

MODEL #	L	W	H	GROSS WEIGHT	CASE QTY
L11T8G40A-25PK	49"	6.3"	5.9"	13 lbs.	25
L11T8G50A-25PK	49"	6.3"	5.9"	13 lbs.	25
L14T8G40A	49"	6.3"	5.9"	13 lbs.	25
L14T8G50A	49"	6.3"	5.9"	13 lbs.	25

5-YEAR LIMITED WARRANTY



AM Conservation warrants that this product is free from defects in material and workmanship for a period of 5 years from the date of the first purchase or the original distribution of the product under an energy conservation program, subject to the proper installation and/or use of the product. For full standard limited product warranty, please visit amconservation.com/warranties.

For warranty claims, please contact:
customer@amconservation.com

To learn more, please visit:
www.AMConservation.com