

LED Wall Pack with Photocell

L35-WPT-50-120/277-D-PC
L50-WPT-50-120/277-D-PC
L80-WPT-50-120/277-D-PC

OVERVIEW

Simply Conserve®'s LED Wall Pack with Photocell offers powerful, energy-efficient illumination for a wide range of outdoor applications including schools, hospitals, parking garages, walkways, and public spaces. Designed with a durable aluminum housing and polycarbonate lens, it provides reliable, uniform light while helping to reduce energy and maintenance costs. An integrated photocell enables automated dusk-to-dawn operation when desired, and 0–10V dimming allows for enhanced control and efficiency. With a long 50,000-hour rated lifespan, this wall pack is built for lasting performance in demanding environments.

FEATURES

- **Photocell-Ready Design**
Includes a built-in photocell for automatic dusk-to-dawn control, with an option to bypass for manual control.
- **Rugged, Outdoor Construction**
Built with die-cast aluminum housing and a weather-resistant polycarbonate lens. Rated IP65 for dependable use in wet conditions.
- **Energy-Efficient Output**
Available in 35W, 50W, and 80W models, offering up to 130 lumens per watt and output ranging from 4,550 to 8,000 lumens.
- **Flexible Control**
Supports 0–10V dimming for optimized energy savings and adaptable light levels in varied environments.
- **Long-Lasting Performance**
Rated for 50,000 hours of operation and engineered for reliability in temperatures ranging from -4°F to 113°F.



50,000
HOURS



BYPASSABLE
PHOTOCELL



POLYCARBONATE
LENS



WET-
RATED

ORDERING INFORMATION

SOURCE	WATTAGE	FIXTURE TYPE	CCT	OPTIONS
L = LED	35 = 35W 50 = 50W 80 = 80W	WPT = Wall Pack Traditional	50=5000K	D = 0-10V Dimming PC = Photocell



SIMPLY CONSERVE®



1701 Charleston Regional Parkway, Suite A
Charleston, SC 29492
(843) 971-1414
www.amconservation.com

LED Wall Pack with Photocell

L35-WPT-50-120/277-D-PC

L50-WPT-50-120/277-D-PC

L80-WPT-50-120/277-D-PC



SIMPLYCONSERVE®

Savings Start Here™

SPECIFICATIONS

MODEL #	WATTS	CCT	LUMENS	CRI	EFFICACY	VOLTAGE	DIM
L35-WPT-50-120/277-D-PC	35W	5000K	4550	≥80	130 lm/W	100-277V	0-10V
L50-WPT-50-120/277-D-PC	50W	5000K	5000	≥80	100 lm/W	100-277V	0-10V
L80-WPT-50-120/277-D-PC	80W	5000K	8000	≥80	100 lm/W	100-277V	0-10V

DIMENSIONS

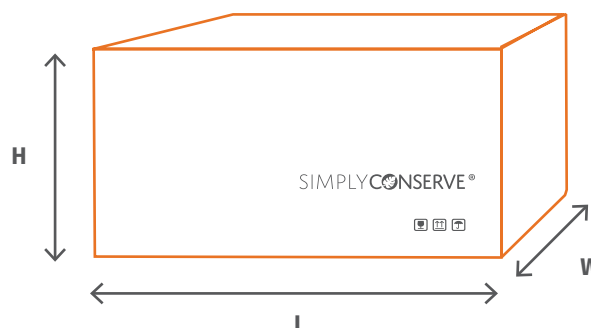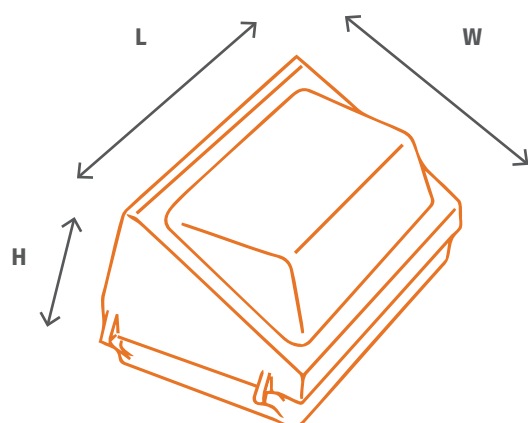

PRODUCT

MODEL #	L	W	H
L35-FCWP-30/50-120/277-D-ADJ	14.3"	9.3"	7.4"
L50-FCWP-30/50-120/277-D-ADJ	14.3"	9.3"	7.4"
L80-FCWP-30/50-120/277-D-ADJ	14.3"	9.3"	7.4"

CASE

MODEL #	L	W	H	GROSS WEIGHT	CASE QTY.
L35-FCWP-30/50-120/277-D-ADJ	15.2"	11.0"	10.2"	6.2 lbs.	1
L50-FCWP-30/50-120/277-D-ADJ	15.2"	11.0"	10.2"	6.2 lbs.	1
L80-FCWP-30/50-120/277-D-ADJ	15.2"	11.0"	10.2"	6.2 lbs.	1

5-YEAR LIMITED WARRANTY



AM Conservation warrants that this product is free from defects in material and workmanship for a period of 5 years from the date of the first purchase or the original distribution of the product under an energy conservation program, subject to the proper installation and/or use of the product. For full standard limited product warranty, please visit amconservation.com/warranties.

For warranty claims, please contact:
customercare@amconservation.com

To learn more, please visit:
www.AMConservation.com